


## Hose for Chemical Applications

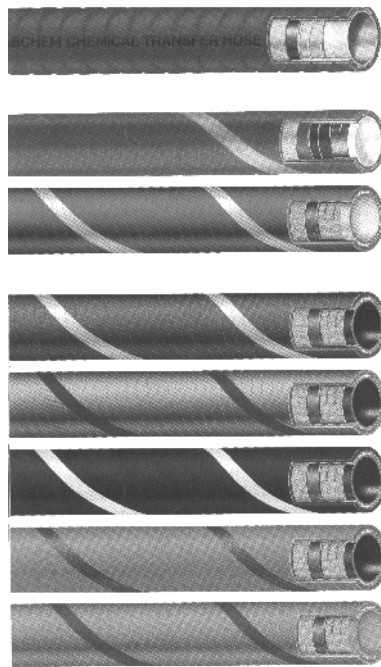

### FABCHEM™

- Available in size ranging from 1 1/2" to 4"
- Special Pliosyn™ (UHMW-PE) tube compound handles up to 98% of common industrial chemicals.
- 200 psi working pressure in all sizes
- Handles temperatures up to 150°F

### HI-PER®

- Available in 1", 1 1/2" and 2" ID
- Teflon (FEP) tube offers ultimate chemicals resistance
- Handle temperatures up to 300°F

### GREEN XLPE

- Available in 2" and 3" ID
- Cross Link Polyethylene tube handles 90% of common industrial chemicals
- 150 psi working pressure in all sizes
- Handles temperatures up to 150°F

### BROWN FLEXWING®

- Available in 2" and 3" ID
- Chemrin® (CPE) tube
- Handles temperatures up to 275°F

### GRAY FLEXWING®

- Available in 2" and 3" ID
- Weatherex® (Butyl) tube
- Handles temperatures up to 220°F

### PURPLE FLEXWING®

- Available in 2" and 3" ID
- Versigard® (EPDM) tube
- Handles temperatures up to 220°F


### ORANGE FLEXWING®

- Available in 2" and 3" ID
- Flosyn® tube
- Handles temperatures up to 250°F

### TAN FLEXWING®

- Available in 2" (Natural Rubber) tube
- Handles temperatures up to 180°F

## Rubber and Plastic Hose



### 120 VP

- Temp. Range: -40°F to 158°F  
 Applications: Gasoline vapor recovery only  
 Construction: Nitrile rubber, rigid PVC helix, smooth bore, corrugated O.D.


Size	Temp. Range	Pressure	Material
1/2"	-40°F to 158°F	150 PSI	Nitrile Rubber
3/4"	-40°F to 158°F	150 PSI	Nitrile Rubber
1"	-40°F to 158°F	150 PSI	Nitrile Rubber
1 1/2"	-40°F to 158°F	150 PSI	Nitrile Rubber
2"	-40°F to 158°F	150 PSI	Nitrile Rubber
3"	-40°F to 158°F	150 PSI	Nitrile Rubber
4"	-40°F to 158°F	150 PSI	Nitrile Rubber



### 120 LT, ST 120 LT

- Temp. Range: -30°F to 158°F  
 Applications: Gasoline tank truck gravity drop hose for such items as naphtha, kerosene, light and heavy oil, and gasohol  
 Construction: Nitrile rubber, rigid PVC helix, synthetic braiding, smooth bore, corrugated O.D.


Size	Temp. Range	Pressure	Material
1/2"	-30°F to 158°F	150 PSI	Nitrile Rubber
3/4"	-30°F to 158°F	150 PSI	Nitrile Rubber
1"	-30°F to 158°F	150 PSI	Nitrile Rubber
1 1/2"	-30°F to 158°F	150 PSI	Nitrile Rubber
2"	-30°F to 158°F	150 PSI	Nitrile Rubber
3"	-30°F to 158°F	150 PSI	Nitrile Rubber
4"	-30°F to 158°F	150 PSI	Nitrile Rubber



### 180 BL

- Temp. Range: -40°F to 158°F  
 Applications: Designed for suction and light blowing of lightweight abrasives such as rockwool, fiberglass, sawdust, grain, insulation and cement dust.

Size	Temp. Range	Pressure	Material
1/2"	-40°F to 158°F	150 PSI	SBR Rubber
3/4"	-40°F to 158°F	150 PSI	SBR Rubber
1"	-40°F to 158°F	150 PSI	SBR Rubber
1 1/2"	-40°F to 158°F	150 PSI	SBR Rubber
2"	-40°F to 158°F	150 PSI	SBR Rubber
3"	-40°F to 158°F	150 PSI	SBR Rubber
4"	-40°F to 158°F	150 PSI	SBR Rubber



### 180 AR

- Temp. Range: -40°F to 158°F  
 Applications: Heavy duty abrasion resistant suction hose for vacuum trucks or handling abrasives such as crushed rock, sand, pea gravel, cement powder, dry fertilizer, iron ore and grains.

Size	Temp. Range	Pressure	Material
1/2"	-40°F to 158°F	150 PSI	SBR Rubber
3/4"	-40°F to 158°F	150 PSI	SBR Rubber
1"	-40°F to 158°F	150 PSI	SBR Rubber
1 1/2"	-40°F to 158°F	150 PSI	SBR Rubber
2"	-40°F to 158°F	150 PSI	SBR Rubber
3"	-40°F to 158°F	150 PSI	SBR Rubber
4"	-40°F to 158°F	150 PSI	SBR Rubber

- Construction: SBR rubber blended with static carbon black, rigid PVC helix, smooth bore, corrugated O.D.

- Features: Lightweight and flexible, static dissipating with no grounding wire, extremely abrasion resistant.

- Note: This hose was not designed for bulk handling such as unloading of rails cars.

