Self -Priming Trash Hog® Pumps





Marlow Trash dog Benefits:
- Unsurpassed in performance and quality
- "Complete Clean" pull out access
- No tool required for clean-out
- Large size solids pumping without clogging
- Replaceable wear plate on 2", 3", 4" & 6"
- Replaceable volute or peeler
- Self-lubricating mechanical seal

TRASH HOGS* — CAST IRON

MODEL	CPB	SIZE	MAXIMUM GALLONS PER MINUTE	MAXIMUM GALLONS PER HOUR	MAXIMUM TOTAL HEAD (FEET)	ENGINE	WEIGHT (LBS.)
1½ HR4B	5MT	1½"	93	5580	53	Briggs & Stratton 8	70
2CR13	10MT	2"	200	12000	118	Wisconsin EY27W	171
3CR18	18MT	3"	372	22320	97	Wisconsin AENLD	295
3CH18	18MT	3"	350	21000	83	Hatz 6S79	320
4DR4*	33MT	4"	660	39600	157	Wisconsin VH-4D	640
4DH4*	33MT	4"	660	39600	164	Ford 2.3L	1290
4DR4*	33MT	4"	655	39300	135	Deutz F2L912	500
4DR5	33MT	4"	645	38700	87	Wisconsin VH-4D	640
4DR5	33MT	4"	645	38700	87	Ford 2.3L	1470
4DR5	33MT	4"	645	38700	87	Deutz F2L912	1070
6TK11	70MT	6"	1350	81000	118	Ford 300	1400
6TK11	70MT	6"	1350	81000	118	GMD s094	2075
6TK11	70MT	6"	1360	81600	115	Deutz F3L912	1380
6TK18	—	6"	1700	102000	73	Ford 2.3L	1460
6TK18	—	6"	1700	102000	73	Deutz F3L912	1380

*For handling 3" diameter solids, specify Model 4DR5.

TRASH PUMPS — LIGHTWEIGHT ALUMINUM

2AL31	7MTC	2"	155	9300	130	Briggs & Stratton 13	75
3CH22	15MTC	3"	315	19080	80	Wisconsin EY27W	110
3CH22	15MTC	3"	350	21000	110	Briggs & Stratton 19 I/C	185
4CH28	22MTC	4	580	34800	108	Briggs & Stratton 32 I/C	205

Self Priming Centrifugal Dewatering Pumps




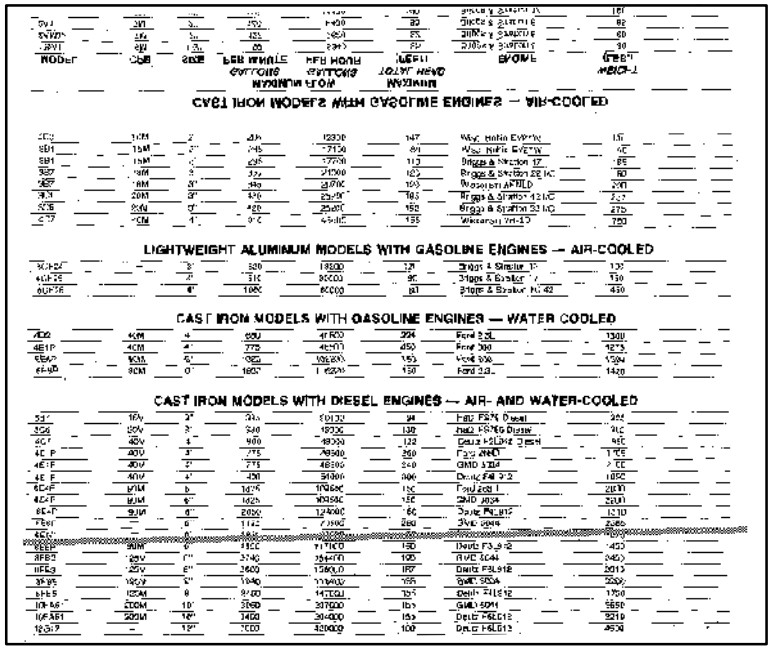
Benefits:
- Quick diffuser priming
- Simplified servicing
- Low operation costs
- Pump restoration simple and inexpensive
- Pump sales and service conveniently located in hundreds of cities throughout the country
- Mechanical seals are self-lubricating
- Performance certified in accordance with CPB standards